



## STRONG BY DESIGN

In repeated high pressure testing (up to 400 psi) the KwikConnect never leaked or failed. In every test, the pipe burst without one KwikConnect failure. KwikConnects are designed for use wherever standard, ASTM D 2609, insert fittings are used.\*

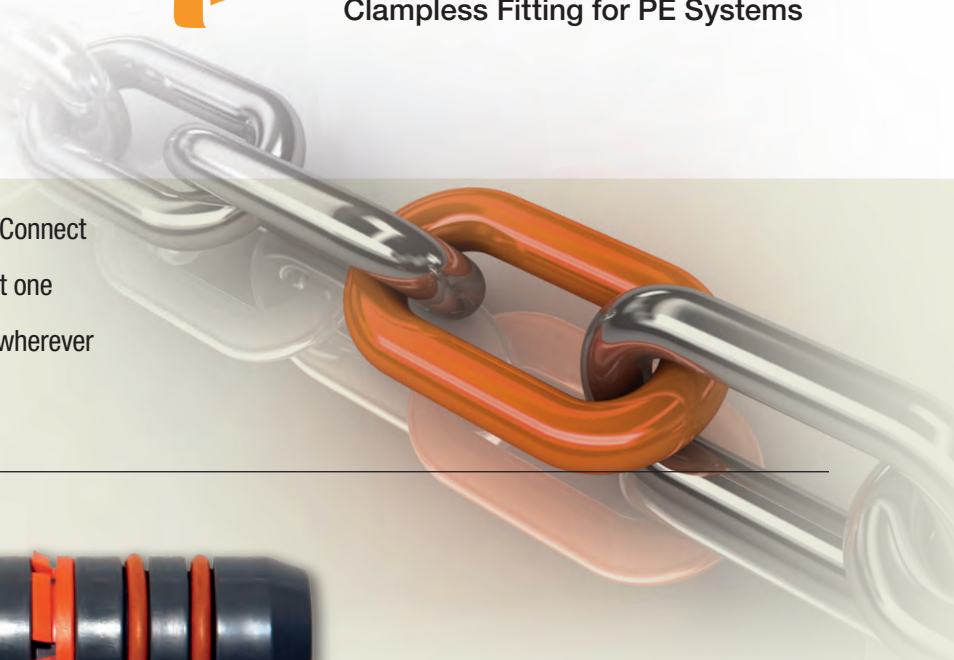

### KwikConnect™ Coupler 1" Patent # 8328241

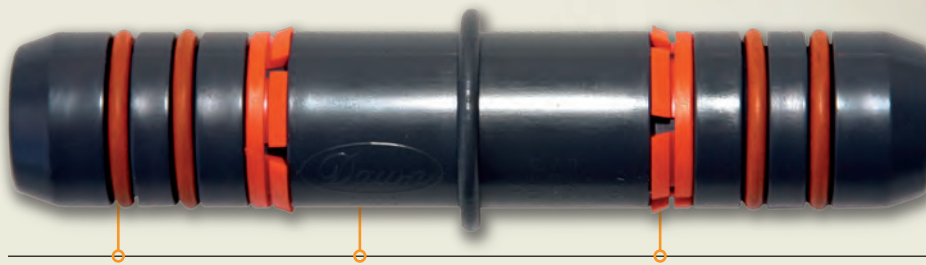

PTFE coated Buna O-rings for ease of installation, and long sealing life.

KwikConnect is made from the finest engineered resins available on the market today.

Unique lock ring provides superior holding power by biting into the pipe and expanding to grip securely in all pressure or hammer situations.

#### KwikConnect™ Features Include

- Installs in seconds
- No clamps needed
- Fast, easy and secure
- Reduces labor
- Saves dollars
- Dependable and reliable

\*Designed for use on 80, 100 and 160 psi pipe which meets ASTM D 2239 pressure rated polyethylene pipe standard as well as Ag drip pipe.



KwikConnect™ End of Line 1"



KwikConnect™ Tee 1"



KwikConnect™ Reducing Tee 1"

1" X 1" X 1/2" FPT  
1" X 1" X 3/4" FPT



KwikConnect™ Reducing Elbow 1"

1" X 1/2" FPT  
1" X 3/4" FPT



800.321.7246 | [www.dawnindustries.com](http://www.dawnindustries.com)